


Alpha Brass Controls
Precisely Qualified

AS02 Single Gas Solenoid Valve

A. Product Introduction



Electrical Rating:
1. 120V AC
2. 240V AC
3. 24V AC

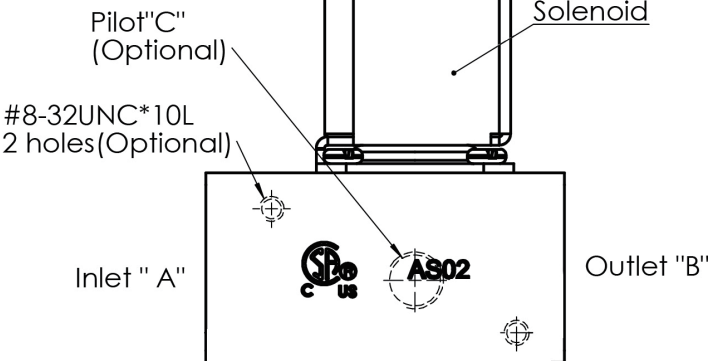

B. Features

- Solenoid in "normally closed" position.
- Compact size is easy to install, multiple inlet/outlet directions applicable to various structures.
- High flow rate is applicable to ovens, griddles and fryers.
- Universal NEMA terminals.
- Inlet filtered with stainless seal mesh.
- AC rectification for silent operation.

C. Specification

General	
BTU	11,000 Btu/hr
KW	32
MJ	116
Inlet/Outlet	3/8"-18NPT or 3/8"-19PT or 1/8"-27NPT or 1/2"-14NPT
Pilot Outlet (Optional)	1/8"-27NPT
Electrical Rating	24VAC or 110/120VAC or 220/240VAC240V AC 50/60 Hz
Max. Operation Pressure	65mbar or 1/2PSI
Ambient Temperature	-20°C~125°C (257°F)